


LED Hi Bay ARD-F type

EAS-LED-ARD-F

Features

Colour: 3000-6500K (5000K Standard)
 Enclosure Material: Al6063-anodized
 Reflector: Frosted PMMA with smooth surface
 No UV, No IR
 Ra: >80
 Luminous Efficiency: 110-120Lm/W
 Beam angle: 120°
 IP 65
 Lifespan: 50,000 hrs
 Input Voltage: 36 VDC
 Light Source: Samsung 5630G2 LED special mixed circuit
 Warranty: 5 Years
 Safety standards: RoHS, CE, EMC

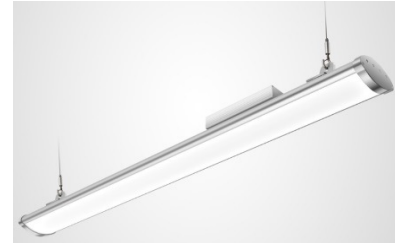

Driver: Meanwell MW HLG-H
 Power: 60~200W
 Dimmable: 1-10V available
 Input Voltage: 90-305 VAC
 Output Voltage: 36 VDC
 Power factor: >0.97

Temperature Rating

Parameter	Rating °C
Heat Sink Temperature	70
Operating Temperature	-20 ~ +40
Storage Temperature	-20 ~ +40

Specification

Model	Length	CCT	Power	Weight	Luminous Flux max
EAS-ARD-6050	600 mm	5000K	60W	4.5 kg	6600lm
EAS-ARD-8050	600mm	5000K	80W	4.5 kg	9000lm
EAS-ARD-10050	900 mm	5000K	100W	6 kg	11550lm
EAS-ARD-12050	900 mm	5000K	120W	6 kg	13650lm
EAS-ARD-15050	1200 mm	5000K	150W	8 kg	17800lm
EAS-ARD-20050	1200 mm	5000K	200W	9 kg	22050lm