
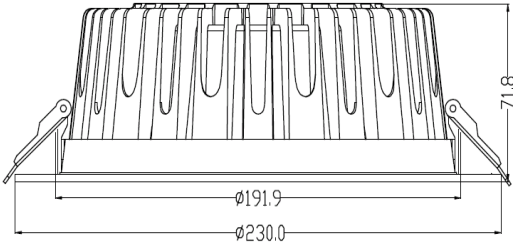
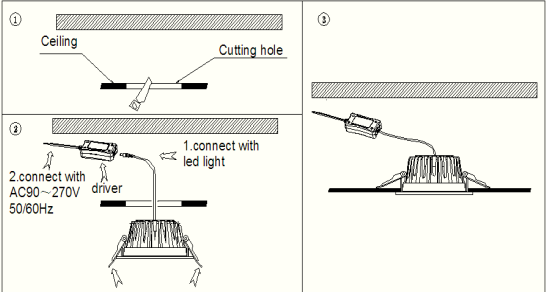


## EAS-DL230-18XX

Product Pictures			Product size			Installing Instruction Pictures		
								
Items	Specification Details			Item	Specification Details			
<b>Model NO.</b>	EAS-DL230-18XX			<b>Driver specification</b>	Input: AC100-240V,50/60Hz Output: DC35-41V,0.58 A			
<b>Rated Power</b>	18W			<b>PF</b>	>0.9			
<b>Product size</b>	ø230×H71.8mm			<b>The beam Angle</b>	120°			
<b>Cut size</b>	ø200mm			<b>Environmental temperature</b>	-20°C ~ +40°C			
<b>LED Type</b>	COB			<b>Storage temperature</b>	-20°C ~ +60°C			
<b>CRI</b>	Ra>80			<b>Materials</b>	Aluminum alloy/glass			
<b>Life span</b>	≥50000h			<b>Inner Box size</b>	L240*W235*H 75 mm			
<b>CCT(K)</b>	2800-3200K	4000-4500K	5800-6500K	<b>Carton size</b>	L495 *W720 *H 165 mm			
<b>Luminance Flux(LM)</b>	1530lm	1566lm	1584lm	<b>Quantity</b>	12 PCS/CTN			
<b>light efficiency</b>	≥ 85lm/W			<b>N.W(KG/PC)</b>	lamp and driver: 1.0 Kg			
<b>Installation</b>	recessed			<b>G.W(KG/CTN)</b>	15 kg			
<b>IP Level</b>	IP20			<b>Warranty</b>	5 years			