

# EASi High Bays



100W/120W



150W/180W



240W

## Features:

- 130lm/w system light efficiency
- IP67 both for indoor and wet locations
- Various beam angle options: 30°, 60°, 90°, 30°x70°
- 0-10V dimmable, DALI, microwave sensor, ZigBee, emergency power supply optional

## Certificates:

- American market: UL, DLC Premium, cUL
- European market: TUV, GS, CB, CE, RoHS
- Australian market: SAA, CTick

## Applications: Warehouses, Manufacturing, Retail, Agriculture, Sports




## Electrical and Photometric Specification

Input Voltage	Driving Current (mA)	Power (W)	Luminous Efficacy (lm/W)	Flux (lm)	Power Factor	Power Efficiency	Beam Angle	LED Brand	CCT (K)	CRI
AC100-277V 50~60Hz	2100	100	130±5	13000±500	0.95	90%	30°/ 60°/ 90°/ 30*70°	112PCS PHILIPS SMD3030	3000 4000 5000 6000	>70
AC100-277V 50~60Hz	2500	120	125±5	15000±600	0.95	90%	30°/ 60°/ 90°/ 30*70°	112PCS PHILIPS SMD3030	3000 4000 5000 6000	>70
AC100-277V 50~60Hz	3200	150	130±5	19500±750	0.95	92%	30°/ 60°/ 90°/ 30*70°	168PCS PHILIPS SMD3030	3000 4000 5000 6000	>70
AC100-277V 50~60Hz	3900	180	125±5	22500±900	0.95	92%	30°/ 60°/ 90°/ 30*70°	168PCS PHILIPS SMD3030	3000 4000 5000 6000	>70
AC100-277V 50~60Hz	5200	240	125±5	30000±1200	0.95	92%	30°/ 60°/ 90°/ 30*70°	224PCS PHILIPS SMD3030	3000 4000 5000 6000	>70


## Mechanical and Environmental Specification

Working Environment	Storage Temperature	Lumen Maintenance (h)	Housing Material	Product Size (mm)	Packing Size (mm)	N.W (kg)	G.W (kg)
-40℃~-50℃ 0% ~ 90%RH	-40℃~+85℃	>50000	Aluminum 6063	300*320*236	350*390*240	6.5kg	8.2kg
-40℃~-50℃ 0% ~ 90%RH	-40℃~+85℃	>50000	Aluminum 6063	300*320*236	350*390*240	6.5kg	8.2kg
-40℃~-50℃ 0% ~ 90%RH	-40℃~+85℃	>50000	Aluminum 6063	390*320*236	440*390*240	8.5kg	10.5kg
-40℃~-50℃ 0% ~ 90%RH	-40℃~+85℃	>50000	Aluminum 6063	390*320*236	440*390*240	8.5kg	10.5kg
-40℃~-50℃ 0% ~ 90%RH	-40℃~+85℃	>50000	Aluminum 6063	480*320*236	530*390*240	10kg	12.5kg

## Lighting Distribution

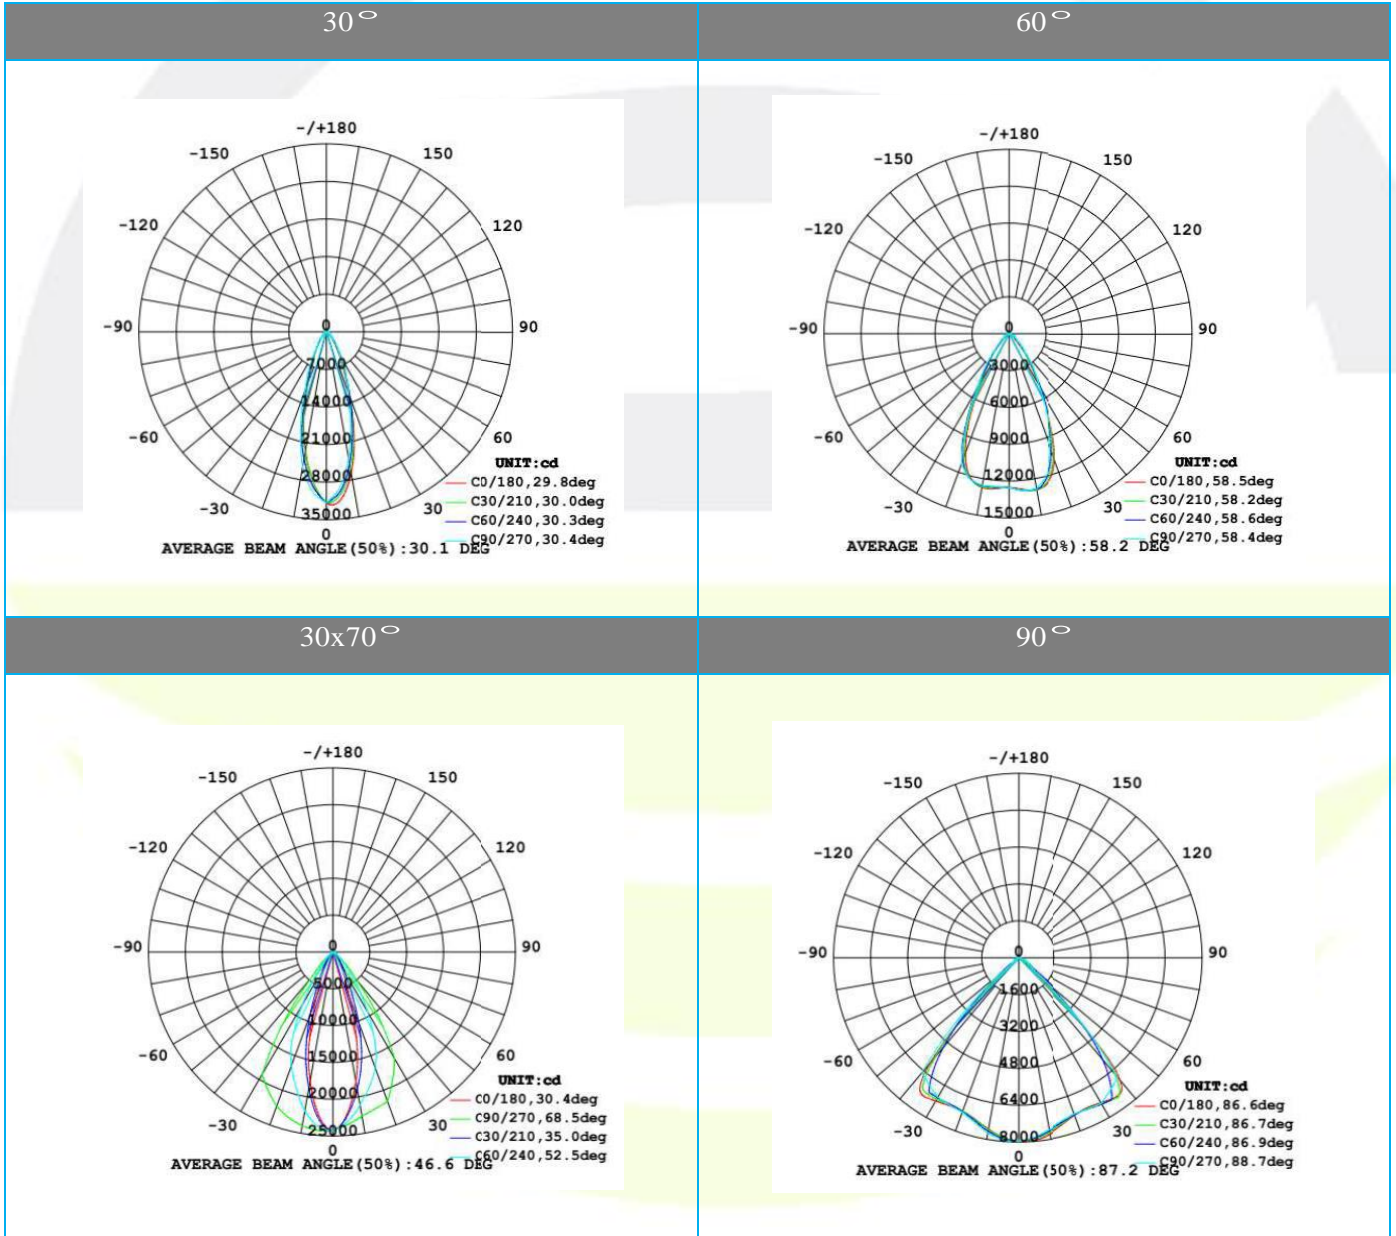


## Dimensions (mm)

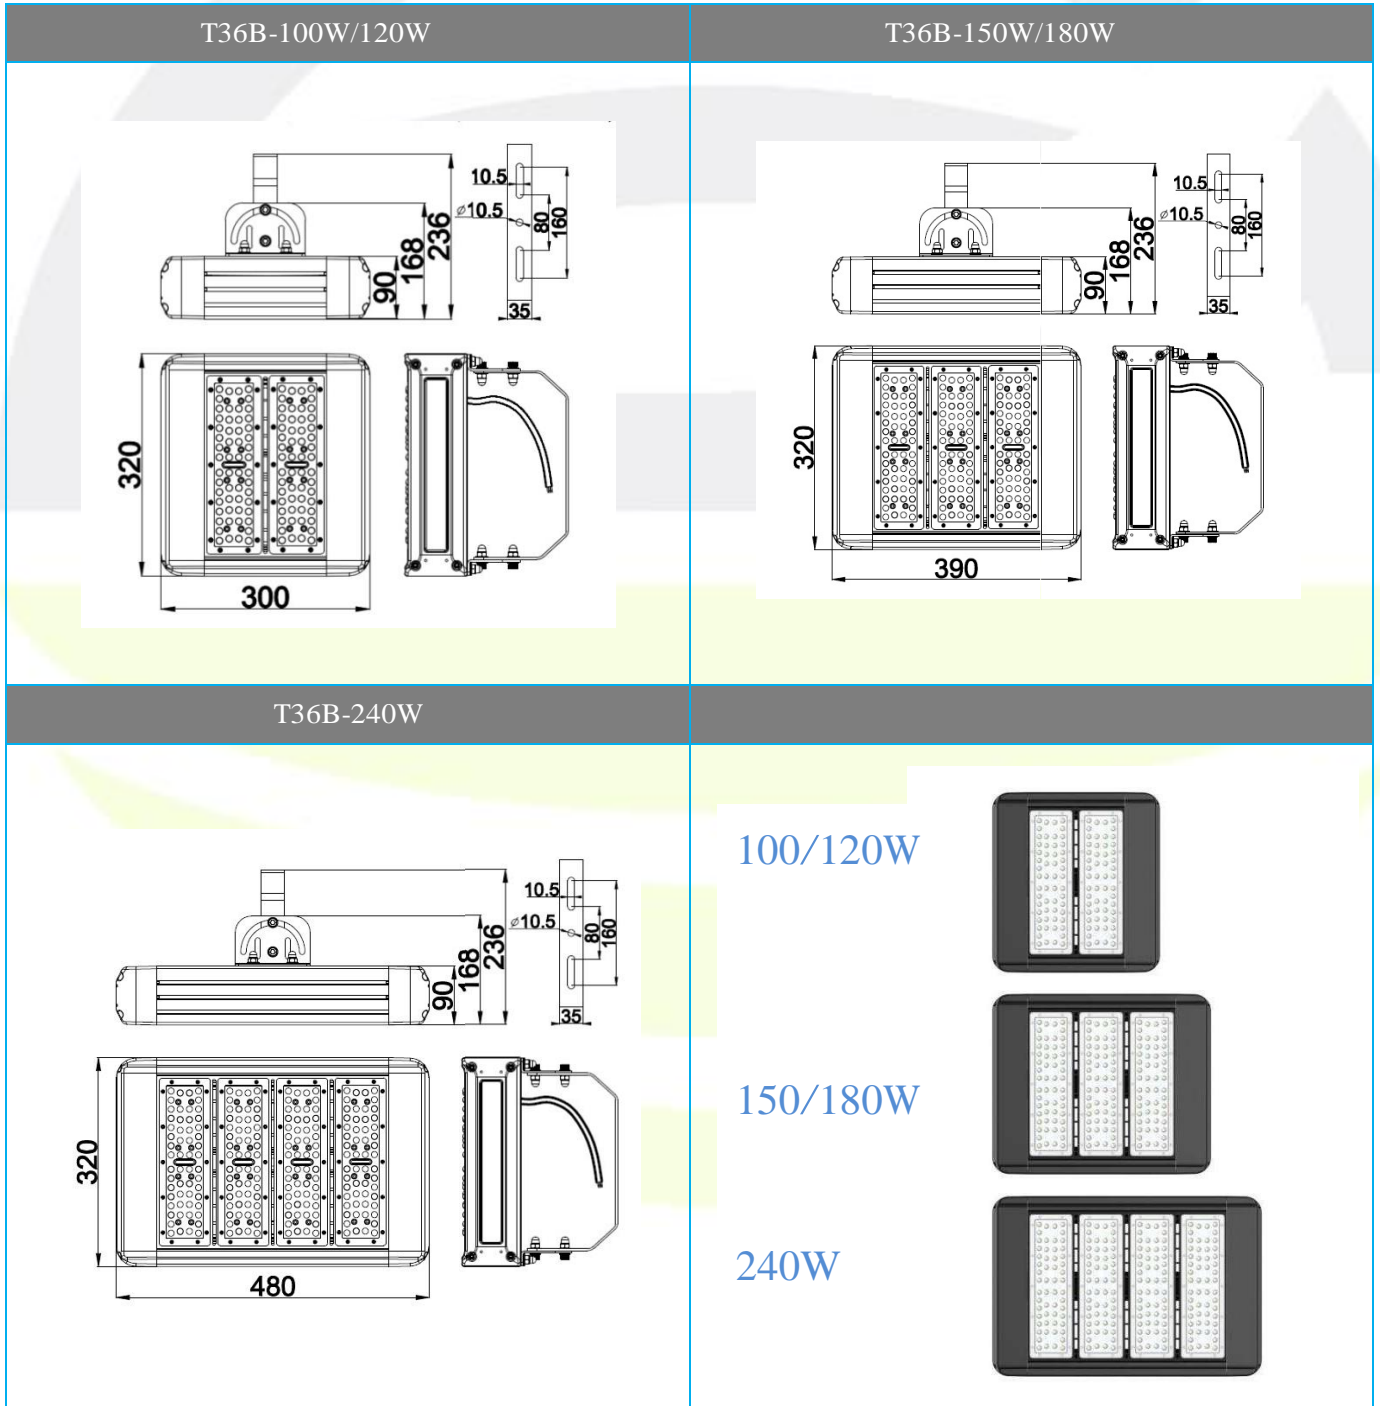


## Installation

### 1) Bracket ceiling mounted

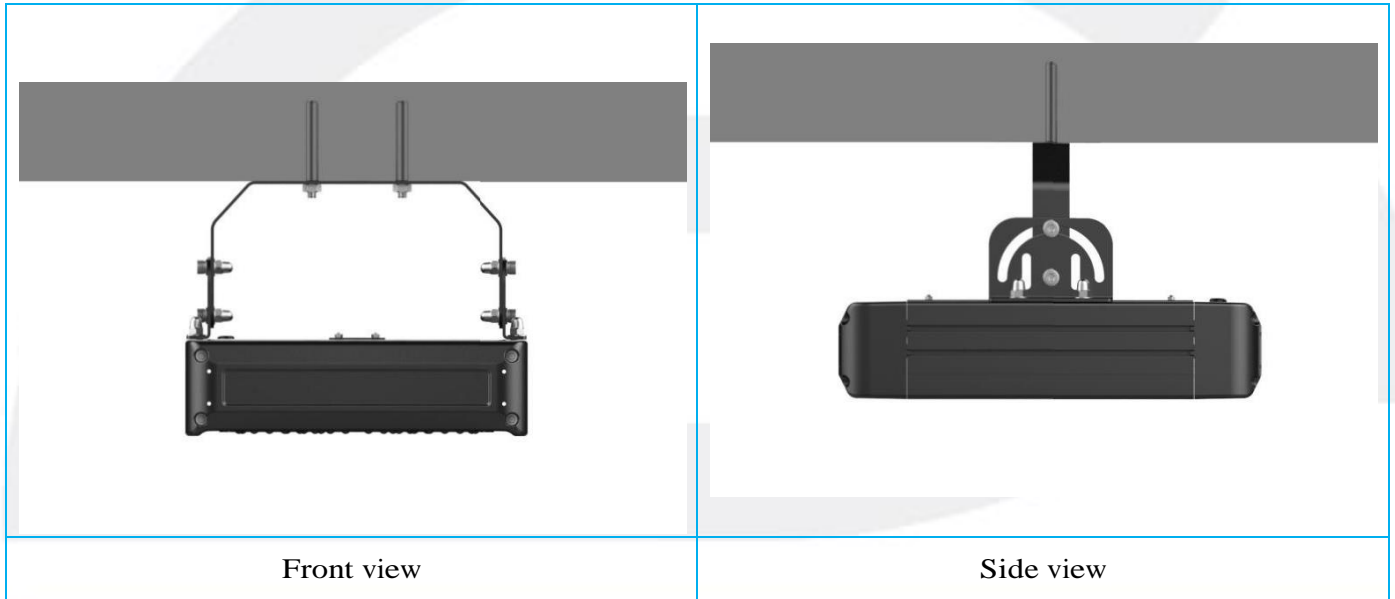

### 2) Hook suspended

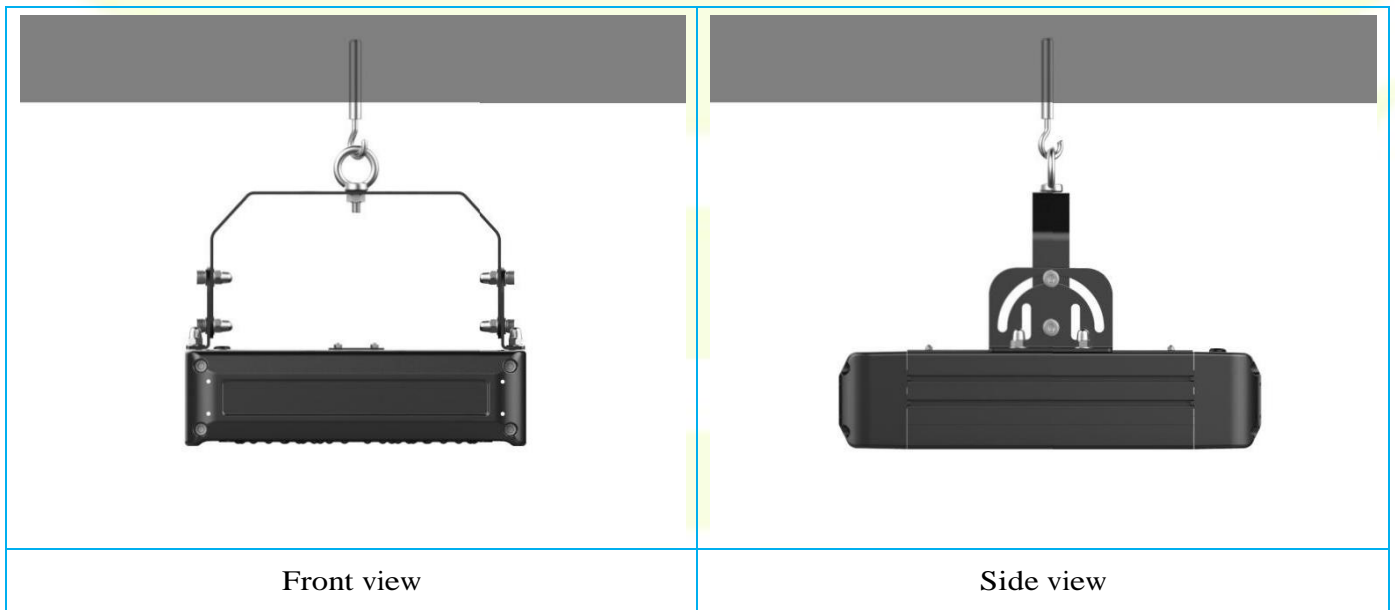

Specifications are subject to change without notice.